

# LINEAR PENDANT


## 90° CONFIGURATION FLUORESCENT

### SPECIFICATION SHEET

PAGE 1 OF 3

Project name:

Type:

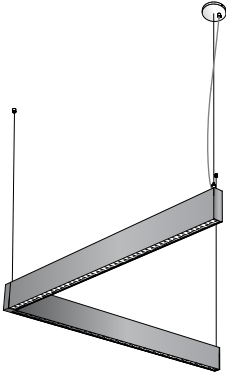

Slim profile pendant luminaire provide direct and or indirect lighting. Available as single modules or continuous runs suitable for interior application where general lighting is required.

**Source:** HE, HO T5 fluorescent (not included).

**Optics:** General lighting.

**Material:**

Body: Extruded aluminum profile with die-cast end caps and joiner.

Diffuser: Clear diffuser for up-light. PMMA frosted acrylic or darklight louver for down-light.

Mounting: Stainless steel suspension cable, clear power cable and die-cast canopy.

**Electrical:** High efficiency electronic ballast 120V or 277V.

1 circuit track (120V only).

For 347V and emergency option, contact factory.

**Dimming:** Contact factory for dimming options.

**Mounting:** Supplied with aircraft cables suspension 5' (1500mm) long, and a white painted canopy, to be installed on a standard 4" junction box.


**Finish:** White RAL9003, black RAL9004 or gray RAL9006

**Weight:** TBC.


**Warranty:** 1 year limited warranty.

**Certification:** cULus listed for damp location.


**MADE IN CANADA**

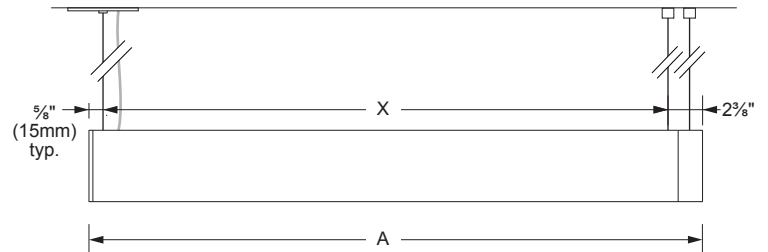

FRONT VIEW



BOTTOM VIEW

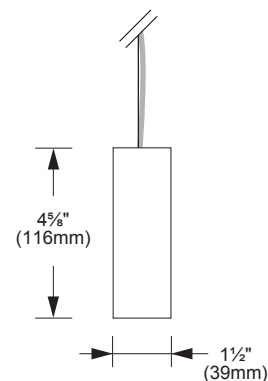


SIDE VIEW

Project name:


Type:

### CONFIGURATIONS


Specify dimensions of each section of configurations in ordering info.  
See figure and table below to use the right **A**, **B**, & **C** dimensions reference.



**L CONFIGURATION**



**U CONFIGURATION**

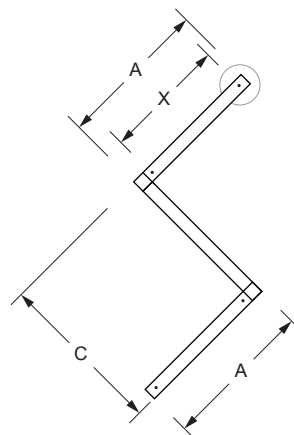


**Z CONFIGURATION**

nominal length	X mounting distance	A Start section	B In-line section	C Square section
2	24"	2'-1 7/8"	2'	2'-1 1/2"
3	36"	3'-1 7/8"	3'	3'-1 1/2"
4	48"	4'-1 7/8"	4'	4'-1 1/2"
6	72"	6'-1 7/8"	6'	6'-1 1/2"
8	96"	8'-1 7/8"	8'	8'-1 1/2"
12*	96"+48"	12'-1 7/8"	12'	12'-1 1/2"
16*	96"+96"	16'-1 7/8"	16'	16'-1 1/2"
24*	96"+96"+96"	24'-1 7/8"	24'	24'-1 1/2"

Contact factory for other lengths at 1' increments  
A visible 1/4" joint is used for lengths greater than 8'.


Maximum total fixture length per single feed:  
120V: 40' for HO (32' with dimming)  
277V: 96' for HO (76' with dimming)

Feed is positioned at one end of the fixture. If needed, the other feed is placed at the opposite end of the fixture.




### 90° ANGLE DETAIL

All angle specifications are supplied with the use of a very precise die-cast joiner, ensuring a tight fit when creating config-

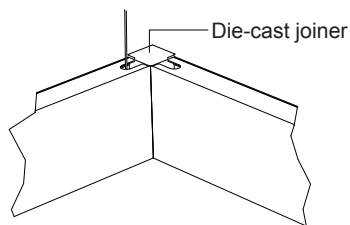


### INSTALLATION OPTIONS (INCLUDED)

**Default option**



The aircraft cable suspension and clear power cable terminate at the canopy.

**Alternate option**



The aircraft cable suspension terminates in the ceiling while the clear power cable and the canopy cover can be located independently

# LINEAR PENDANT

## 90° CONFIGURATION FLUORESCENT

### SPECIFICATION SHEET

PAGE 3 OF 3

Project name: \_\_\_\_\_

Type: \_\_\_\_\_

#### ORDERING INFO

MODEL	CONFIG.	A B or C LENGTH	LAMPING INDIRECT	LAMPING DIRECT	OPTIC INDIR.	OPTIC DIRECT	VOLTAGE	FINISH
<b>3500 -</b>								
	<b>CONFIG.</b>	<b>DIMENSION</b>	<b>LAMPING INDIRECT</b>	<b>LAMPING DIRECT</b>	<b>OPTIC DIRECT</b>	<b>VOLTAGE</b>	<b>FINISH</b>	
	<input type="radio"/> <b>L</b> <input type="radio"/> <b>U</b> <input type="radio"/> <b>Z</b>	<b>A : _____</b> <b>B or C : _____</b> <b>Min 02'</b> <b>01' increments</b>	<input type="radio"/> <b>HE</b> - 28W T5 HE <input type="radio"/> <b>HO</b> - 54W T5 HO <input type="radio"/> <b>NO</b> - Empty	<input type="radio"/> <b>HE</b> - 28W T5 HE <input type="radio"/> <b>HO</b> - 54W T5 HO <input type="radio"/> <b>NO</b> - Empty <input type="radio"/> <b>1C</b> - 1 circuit track (120V only) *	<input type="radio"/> <b>FD</b> - Frosted <input type="radio"/> <b>DL</b> - Darklight louver <input type="radio"/> <b>NA</b> - Track version	<input type="radio"/> <b>120</b> - 120V <input type="radio"/> <b>UNV</b> - 120-277V	<input type="radio"/> <b>01</b> - White <input type="radio"/> <b>02</b> - Black <input type="radio"/> <b>10</b> - Gray	

\*FOR TRACK VERSION: Projector(s) not included. Contact factory for maximum number of projectors.