

Project name: _____

Type: _____



Slim profile pendant luminaire provide direct and or indirect lighting. Available as single modules or continuous runs suitable for interior application where general lighting is required.

Source: HE, HO T5 fluorescent (not included).

Optics: General lighting.

Material:

Body: Extruded aluminum profile with die-cast end caps and joiner.

Diffuser: Clear diffuser for up-light. PMMA frosted acrylic or darklight louver for down-light.

Mounting: Stainless steel suspension cable, clear power cable and die-cast canopy.

Electrical: High efficiency electronic ballast 120V or 277V. 1 circuit track (120V only).

Dimming: Contact factory for dimming options.

Mounting: 5' field adjustable suspension cable. to be installed on a standard 4" junction box.

Finish: White RAL9003, black RAL9004 or gray RAL9006
The canopy is supplied white, other finishes available on demand.

Weight: TBC.

Warranty: 1 year limited warranty.

Certification: cULus listed for Damp location.

MADE IN CANADA

Project name:



Type:

LENGTH

Nominal length	Actual length A	Anchoring points mounting distance B
02	2'-1 $\frac{1}{8}$ "	24"
03	3'-1 $\frac{1}{8}$ "	36"
04	4'-1 $\frac{1}{8}$ "	48"
06	6'-1 $\frac{1}{8}$ "	72"
08	8'-1 $\frac{1}{8}$ "	96"
12*	12'-1 $\frac{1}{8}$ "	96"+48"
16*	16'-1 $\frac{1}{8}$ "	96"+96"
24*	24'-1 $\frac{1}{8}$ "	96"+96"+96"

The luminaires runs can be manufactured in most lengths with 12" increments. Contact the factory for precise lengths and anchoring point details.

*Note that a visible 1/4" joint is used for lengths greater than 8'.

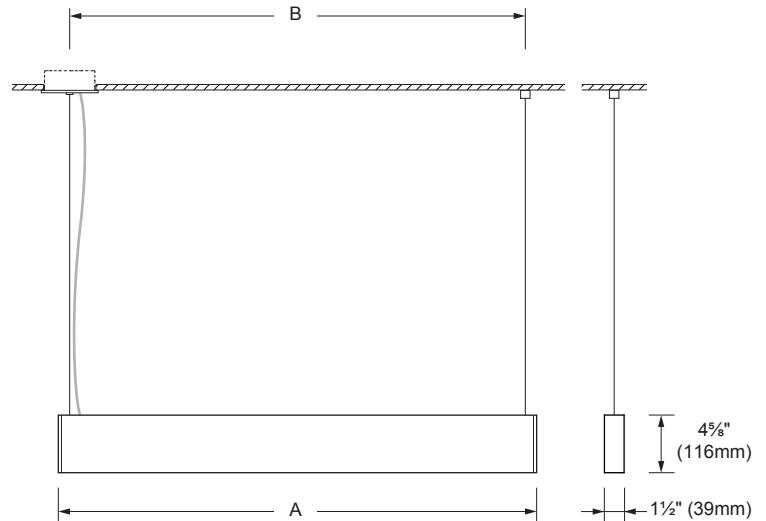

ACCESSORIES (TO BE ORDERED SEPARATELY) *for installation consult the instruction sheet

- ☐ **3637** - Accessory for T-Bar Mounting (White)
Kits of two anchors



Length	# Of kits needed
Up to 8'	1
8' to 24'	2
25' to 40'	3
41' to 56'	4
57' to 72'	5
73' to 88'	6
89' to 104'	7


INSTALLATION OPTIONS (INCLUDED)

Default option



The aircraft cable suspension and the clear power cable terminates at the canopy.

Alternate option



The aircraft cable suspension terminates in the ceiling while the clear power cable and the canopy cover can be located independently.

INDIRECT / DIRECT

MODEL	LENGTH	LAMPING INDIRECT	LAMPING DIRECT	OPTIC	VOLTAGE	FINISH	OPTIONAL EM
	LENGTH	LAMPING INDIRECT	LAMPING DIRECT	OPTIC DIRECT	VOLTAGE	FINISH	OPTIONAL EM
<input type="radio"/>	02	<input type="radio"/> HE - 14W, 21W or 28W T5 HE Fluorescent	<input type="radio"/> HE - 14W, 21W or 28W T5 HE Fluorescent	<input type="radio"/> FD - Frosted	<input type="radio"/> 120 - 120V	<input type="radio"/> 01 - White	<input type="radio"/> EM - Emergency ballast
<input type="radio"/>	03	<input type="radio"/> HO - 24W, 39W or 54W T5 HO Fluorescent	<input type="radio"/> HO - 24W, 39W or 54W T5 HO Fluorescent	<input type="radio"/> DL - Darklight louver	<input type="radio"/> 277 - 277V	<input type="radio"/> 02 - Black	
<input type="radio"/>	04	<input type="radio"/> NO - Empty	<input type="radio"/> NO - Empty	<input type="radio"/> NA - Track version		<input type="radio"/> 10 - Gray	
<input type="radio"/>	06			<input type="radio"/> CD - Clear diffuser			
<input type="radio"/>	08						
<input type="radio"/>	12						
<input type="radio"/>	16						
<input type="radio"/>	24						

* Projector(s) not included. Contact factory for maximum number of projectors.

Project name: _____
Type: _____

OPTIONAL EMERGENCY

☐ **EM** SPECIFY THE QUANTITY OF BATTERY PACKS REQUIRED.
#BATT. PACK

EM BATTERY PACK ARE ONLY AVAILABLE FOR FLUORESCENT VERSIONS OF 4 FEET AND MORE.
NOTE THAT FOR UNITS LONGER THAN 4 FEET, AN ADDITIONAL FEED, LOCATED AT THE END OF THE LINE, WILL BE REQUIRED FOR MULTI-CIRCUIT LUMINAIRE.
OPERATING VOLTAGE HAS TO BE SPECIFIED FOR EM OPTION.
A LAYOUT FROM THE CLIENT IS REQUIRED FOR BATTERY PACK POSITION. USE THE SELECTION TOOL BELOW.
INSURE JUNCTION BOX AT EACH FEED LOCATION.
FOR 28W T5. FOR 54W T5 HO. MAXIMUM MOUNTING HEIGHT=14ft. MAX.

SELECT EMERGENCY LAMP LOCATION

