

**IMPORTANT** - READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES, BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT, AND THE HAZARDS INVOLVED. PROPER GROUNDING IS REQUIRED FOR SAFETY.

**⚠ DISCONNECT THE MAIN LINE BEFORE WIRING SECONDARY CONNECTORS.**

## SOLO UNIT INSTALLATION INTEGRAL DRIVER (120 / 277V) DIMMING TRIAC/ELV (10%) OR 0-10V (1%)

A- PREPARE THE CEILING WITH ANCHOR SCREWS (SEE TABLE ON PAGE 2).

B- SEE DETAIL 1:

1- PASS WIRES THROUGH THE CANOPY.


2- MAKE THE NECESSARY WIRE CONNECTIONS (SEE WIRING DIAGRAM) USING TWIST CONNECTORS (NOT INCLUDED).

**FOR D01 DIMMING:** WIRES MUST BE RUN THROUGH A SEPARATE KNOCKOUT HOLE FROM JUNCTION BOX.


3- INSTALL THE UNIVERSAL CROSSBAR USING PHILLIPS SCREWS (INCLUDED) AND THE CANOPY USING PHILLIPS SCREWS (INCLUDED).

C- INSTALL THE UNIT TO THE CEILING USING #8 SCREWS (INCLUDED) INTO THE ANCHOR SCREWS.


D- CONNECT THE LASER BLADES USING THE QUICK CONNECTORS (INCLUDED) AND SNAP THEM INTO THE UNIT. FILL THE GAP WITH THE COVER PLATE.

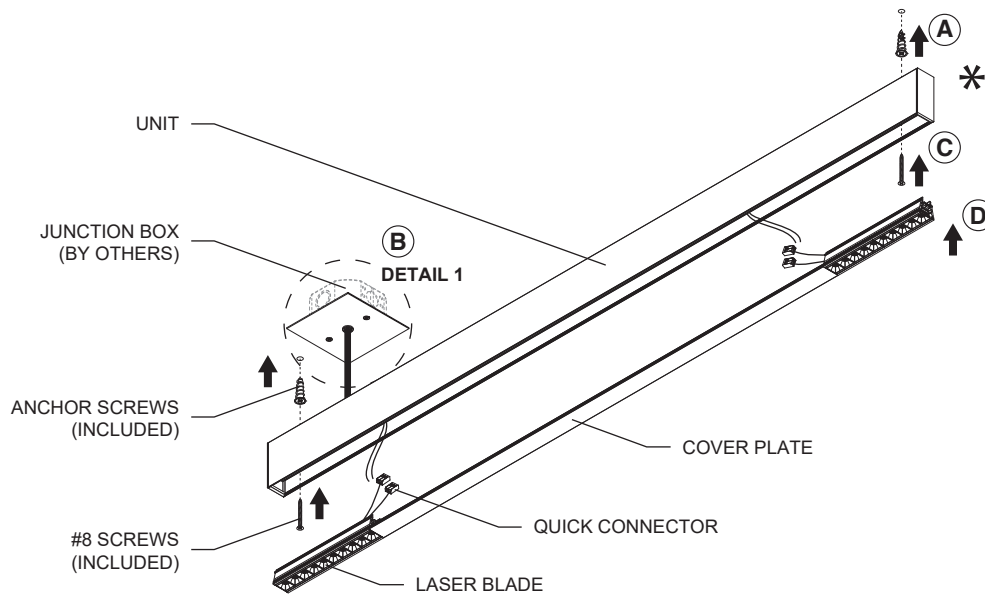

### DETAIL 1

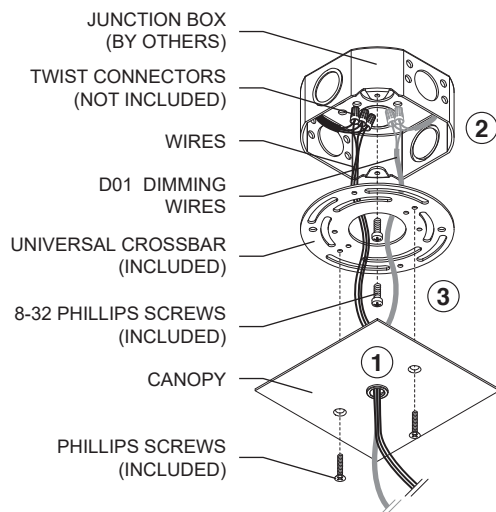


### WIRING DIAGRAM\*

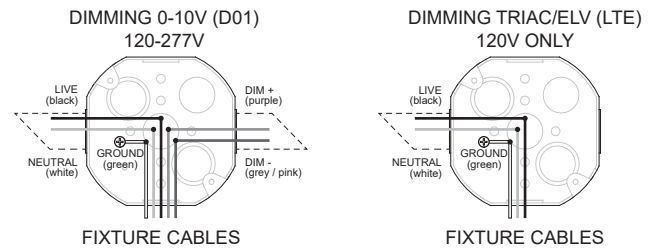


\*for reference only

## SURFACE ANCHOR POINTS DISTANCE

### SOLO UNIT 4'

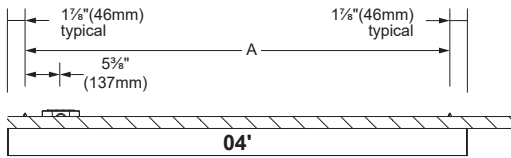

### SOLO UNIT 8'

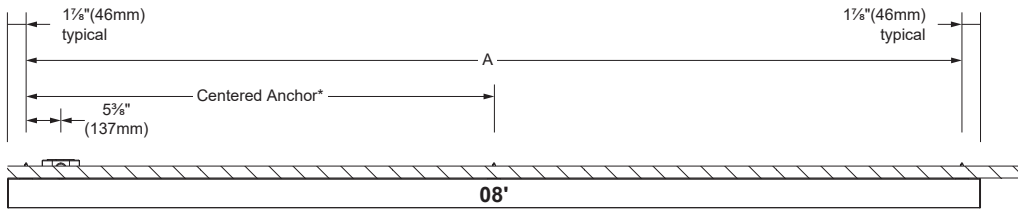

ANCHOR POINTS FOR LINEAR SURFACE ALL CONFIGURATIONS			
Nominal length	Actual length	Anchor distance (A)	Anchor qty
<b>04'</b>	4' (1.218m)	3'-8 <sup>5</sup> / <sub>16</sub> " (1.125m)	2
<b>08'</b>	7'-11 <sup>7</sup> / <sub>8</sub> " (2.435m)	4'-8 <sup>3</sup> / <sub>16</sub> " (2.342m)	3