


Project name: _____

Type: _____

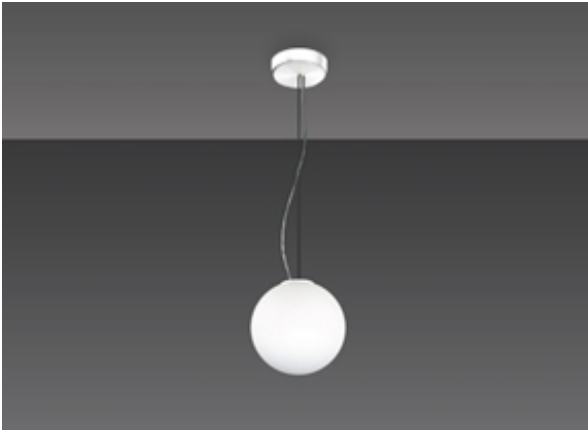

This classic design creates a soft and inviting glare free atmosphere suitable for both commercial and residential applications.

Luminaire characteristics:

Power input: 8W

Lumens: 551lm

Luminaire efficacy: 67lm/W

Source: LED module (LM-80 tested).

2700K: 80CRI

3000K: 80CRI

3500K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours (L80)

Optics: General lighting.

Mounting: 5' field adjustable clear suspension cable and one canopy. Installs on a standard 4" Junction box.

Material:

Body: Machined aluminum glass holder.

Diffuser: Frosted acrylic shade.

Canopy: Die-cast aluminum.

Suspension: Galvanize steel aircraft cable.

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.


Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only).

Finish: White RAL9003 or gray RAL9006 with white canopy.


Weight: 2.45lbs (1.11kg)

Warranty: 5 year limited warranty.

Certification: cULus listed for dry location.

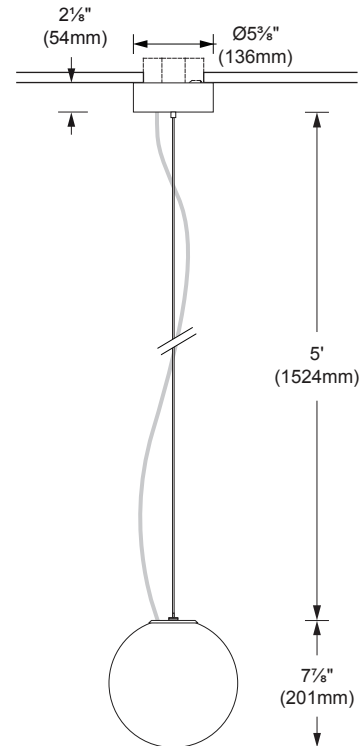

FRONT VIEW



BOTTOM VIEW

Project name: _____

Type: _____



TECHNICAL DATA

Photometric performance is measured at an accredited independent laboratory in accordance with IESNA LM-79. Visit sistemalux.com for complete photometric data.

LOAD (W)	CCT (K)	CRI	OPTIC	DELIVERED LUMENS (lm)	LUMINAIRE EFFICACY (lm / w)	CENTER BEAM CANDLE POWER (cd)	MODEL
8W	3000K*	80*	General light	551	67	58	1930-830

*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA

Color options	Multiplier
2700K - 80CRI	0.96
3000K - 80CRI	1
3500K - 80CRI	1.02
4000K - 80CRI	1.04

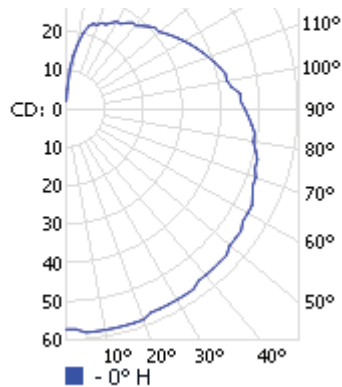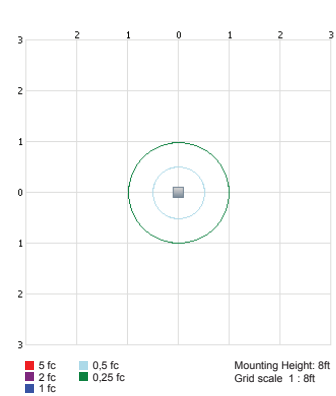

3000K - 80 CRI - General light

ORDERING INFO

MODEL	LED	VOLTAGE	FINISH	DIMMING
<input type="radio"/> 1930	<input type="radio"/> 827 - 2700K <input type="radio"/> 830 - 3000K <input type="radio"/> 835 - 3500K <input type="radio"/> 840 - 4000K	<input type="radio"/> UNV- 120-277V <input type="radio"/> 120- 120V	<input type="radio"/> 01 - White <input type="radio"/> 10 - Gray	<input type="radio"/> D10 - 0-10V <input type="radio"/> LTE - Leading (Triac) and trailing edge (ELV) for 120V only

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: January 10, 2020

CL - R3