

Project name:

Type:



This classic design creates a soft and inviting glare free atmosphere suitable for both commercial and residential applications.

Luminaire characteristics:

Power input: 29.2W

Lumens: 2050 lm

Luminaire efficacy: 70 lm/W

Source: LED module (LM-80 tested).

2700K: 80CRI

3000K: 80CRI

3500K: 80CRI

4000K: 80CRI

Lumen maintenance: >80% of initial lumens at 50 000 hours (L80)

Optics: General lighting.

Mounting: 5' field adjustable clear suspension cable and one canopy. Installs on a standard 4" Junction box.

Material:

Body: Machined aluminum glass holder.

Diffuser: Frosted acrylic shade.

Canopy: Die-cast aluminum.

Suspension: Galvanized steel aircraft cable.

Electrical: High efficiency electronic power supply, rated 50 000 hours 120V-277V.


Dimming: Power supply compatible with 0-10V (UNV) or leading (TRIAC) and trailing edge (ELV) (120V only)

Finish: White RAL9003 or gray RAL9006 with white canopy.


Weight: 9.05lbs (4.11kg)

Warranty: 5 year limited warranty.

Certification: cULus listed for damp location.

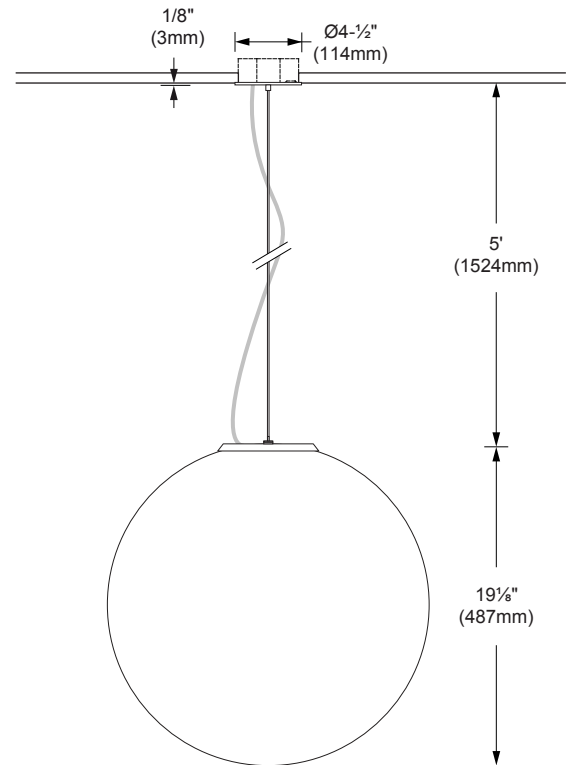

FRONT VIEW

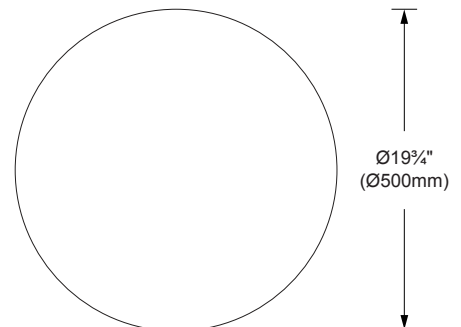

BOTTOM VIEW

Project name:

Type:



TECHNICAL DATA

Photometric performance is measured at an accredited independent laboratory in accordance with IESNA LM-79. Visit sistemalux.com for complete photometric data.

LOAD	CCT	CRI	OPTIC	DELIVERED LUMENS	LUMINAIRE EFFICACY	CENTER BEAM CANDLE POWER	MODEL
(W)	(K)			(lm)	(lm / w)	(cd)	
29.2W	3000K*	80*	General light	2050	70	183	1935-830

*USE MULTIPLIER TABLE FOR OTHER CCT AND CRI OUTPUT DATA

Color options	Multiplier
2700K - 80CRI	0.96
3000K - 80CRI	1
3500K - 80CRI	1.04
4000K - 80CRI	1.06



3000K - 80 CRI

ORDERING INFO

MODEL	LED	VOLTAGE	FINISH	DIMMING
☐ 1935	☐ 827 - 2700K ☐ 830 - 3000K ☐ 835 - 3500K ☐ 840 - 4000K	☐ UNV- 120-277V ☐ 120- 120V	☐ 01 - White ☐ 10 - Gray	☐ D10 - 0-10V ☐ LTE - Leading (Triac) and trailing edge (ELV) for 120V only

DUE TO CONTINUOUS IMPROVEMENTS, THE INFORMATION HEREIN MAY BE CHANGED WITHOUT NOTICE.

LAST UPDATE: January 11, 2019

JP - R2

SISTEMALUX



9320 Boul. St-Laurent, suite 100, Montréal (Québec) Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107 www.sistemalux.com