
SKILL



WALL MOUNTED

BOLLARD

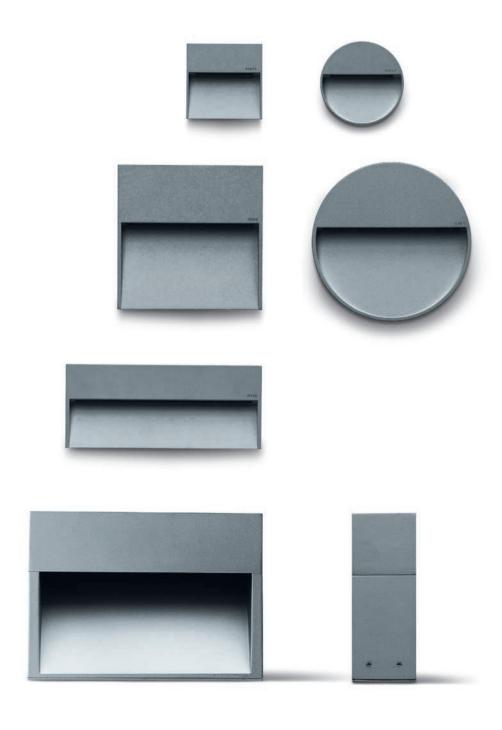

SKILL Wall mounted lights

CONSTRUCTION

Die-cast aluminum housing (copper free) with high corrosion resistance Stainless steel fasteners Tempered glass diffuser Silicone gaskets

FINISH SYSTEM

Double powder paint in 3 step process:

- surface treatment containing ceramic nano particles (Bonderite)
- epoxy primer paint
- polyester powder paint with high resistance against UV rays and harsh weather conditions

IP65



Supplied with LM80 tested LEDs L70>50,000 hours

COLORS

White (code 01)Aluminum grey (code 14)



SKILL Wall mounted step lights

MINISKILL ROUND





CODE	W	LUMENS	KELVIN
S.6270W	6W	160 lm	3000K
Requires remote power supply			

Requires remote power supp Also available in 4000K



MINISKILL SQUARE





CODE	W	LUMENS	KELVIN
S.6250W	6W	164 lm	3000K
Requires rer	nota nowar si	innly	


Requires remote power supply Also available in 4000K



SKILL Wall mounted step lights

SKILL ROUND





CODE	W	LUMENS	KELVIN
S.6280W	12.5W	399 lm	3000K

Requires remote power supply Also available in 4000K



SKILL SQUARE







CODE	W	LUMENS	KELVIN	WIDTH
S.6260W	12.5W	400 lm	3000K	7-7/8"
Requires remote power supply				
S.6255W	23.8W	679 lm	3000K	10-5/8"

Also available in 4000K

7-14/16"


7-7/8" 1-3/16"





SKILL RECTANGULAR





 CODE
 W
 LUMENS
 KELVIN

 S.6240W
 13.5W
 378 lm
 3000 K

Requires remote power supply Also available in 4000K



SKILL

Recessed wall mounted step lights

MINISKILL ROUND FLUSH INSTALLATION



MINISKILL SQUARE FLUSH INSTALLATION



SKILL ROUND FLUSH INSTALLATION




SKILL SQUARE FLUSH INSTALLATION



SKILL RECTANGULAR FLUSH INSTALLATION




S.6270W-FM Recessed box: S.6278




S.6250W-FM

Recessed box: S.6256




S.6280W-FM

Recessed box: S.6288




S.6260W-FM

Recessed box: S.6268




S.6255W-FM

Recessed box: S.6257



S.6240W-FM

Recessed box: S.6247



SKILL BOLLARD

CONSTRUCTION

Die-cast aluminum housing (copper free) with high corrosion resistance Stainless steel fasteners Tempered glass diffuser Silicone gaskets.

FINISH SYSTEM

Double powder paint in 3 step process:

- surface treatment containing ceramic nano particles (Bonderite);
- epoxy primer paint;
- Polyester powder paint with high resistance against UV rays and harsh weather conditions

IP65



Supplied with LM80 tested LEDs L70>50,000 hours

COLORS

Aluminum grey (code 14)



SKILL BOLLARD





CODE	W	LUMENS	KELVIN
S.6350W	18W	243 lm	3000K







 CODE
 W
 LUMENS
 KELVIN

 S.6360W
 35W
 603 Im
 3000 K

